

# MARKBÄDD PÅ BURK

## ECOROCK-5000

CAPACITY UP TO 25 PE



1	Water inlet
2	Water outlet
3	Air inlet
4	Air outlet
5	Overflow Alarm

Characteristics	Value	Unit
<b>ECOROCK-5000 Treatment Unit</b>		
Minimum volume pre-treatment*	500	liters/PE
Capacity in population equivalent	30	PE
Daily volume of wastewater **	150	litres/day/PE
Daily hydraulic load	4.5	m <sup>3</sup> /day
Organic load per PE	60	gr.BOD <sub>5</sub> /PE/jour
Organic load raw influent up to	1.8	kg BOD <sub>5</sub> /day

Specification	Value	Unit
Tank volume	5000	Liters
Overall length	3500	mm
Overall width	1150	mm
Total height of the tank	2175	mm
Overall height (+ventilation pipe)	2350	mm
Total weight (without water)	680	Kg
Pipe diameter	110	mm

This treatment unit can be installed in high ground water table.

\*minimum 2000 liters of pre-treatment  
 \*\*according to DIN EN 12566-3

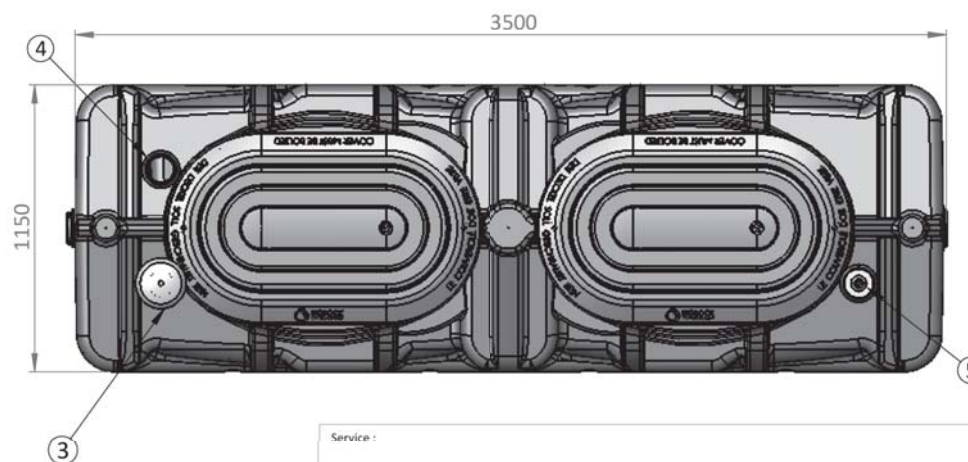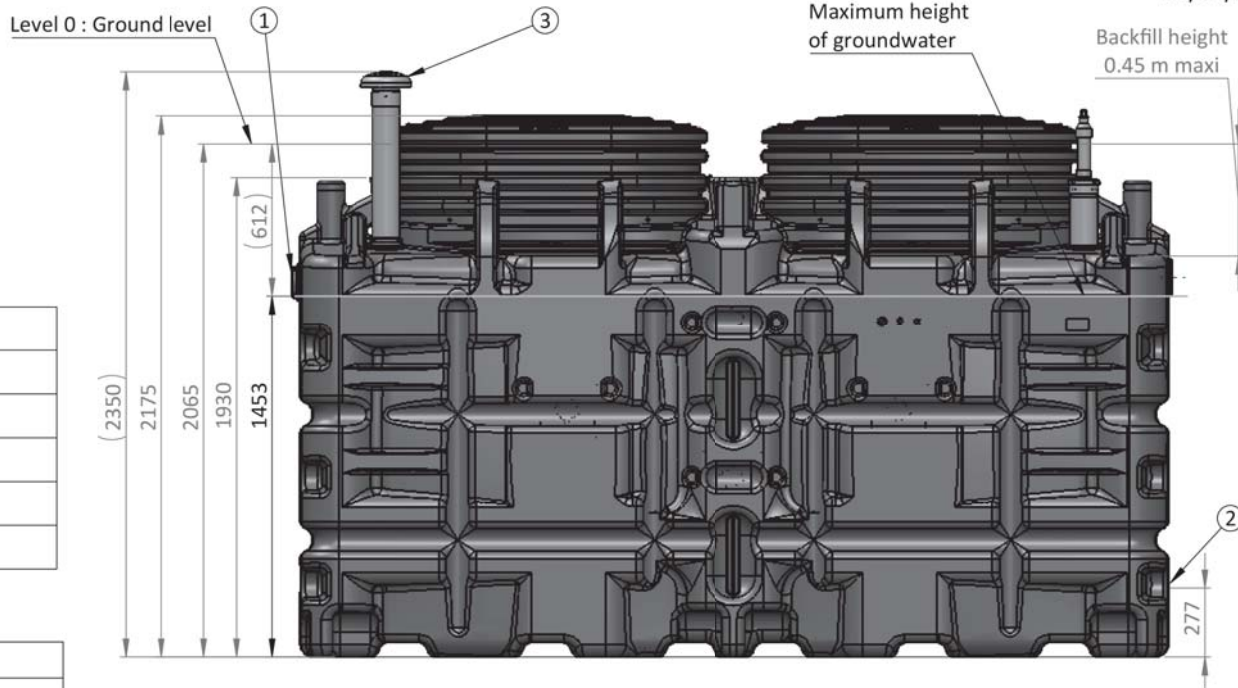

Service :			
ORIGINATOR			
NAME	SIGNATURE	DATE	
AUTHOR: AQ		04/04/2016	
APPROV.			
CHANGES			
NAME	SIGNATURE	DATE	
AUTHOR:			
APPROV.:			
CHANGES			
AUTHOR:			
APPROV.:			

**4evergreen**

**MARKBÄDD PÅ BURK  
 ECOROCK-5000**

TITLE:

Nb. of PLAN

UT-X5000

A3

Overall tolerance : 3%

SCALE:1:22